




DOUBLE-PITCH ROOF 15°, ROLLING, WITH TRIANGULAR SUPPORT

*The ideal rolling and temporary roofing solution during insulation work
in road and civil engineering.*

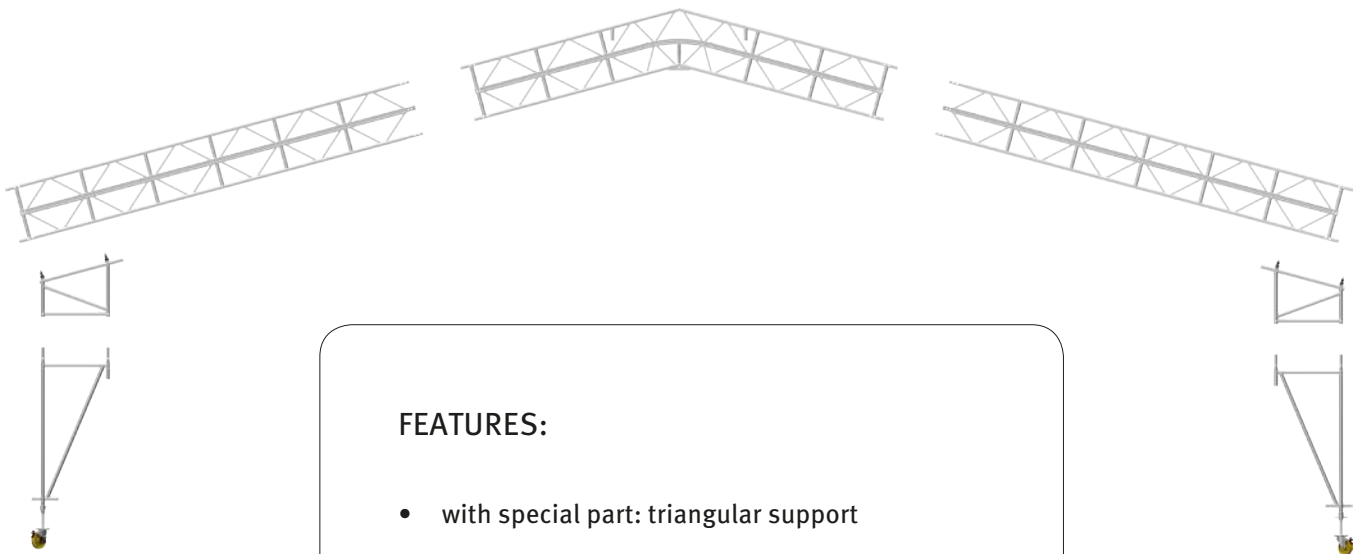

FEATURES:

- with special part: triangular support
- roof pitch: 15°
- span: max. 16.10 m
- easy to move by hand
- highly durable keder tarpaulins