




DOUBLE - PITCH ROOF 15° MOBILE, WITH TRIANGULAR SUPPORT

The ideal mobile and temporary roofing solution during insulation work in road and civil engineering.

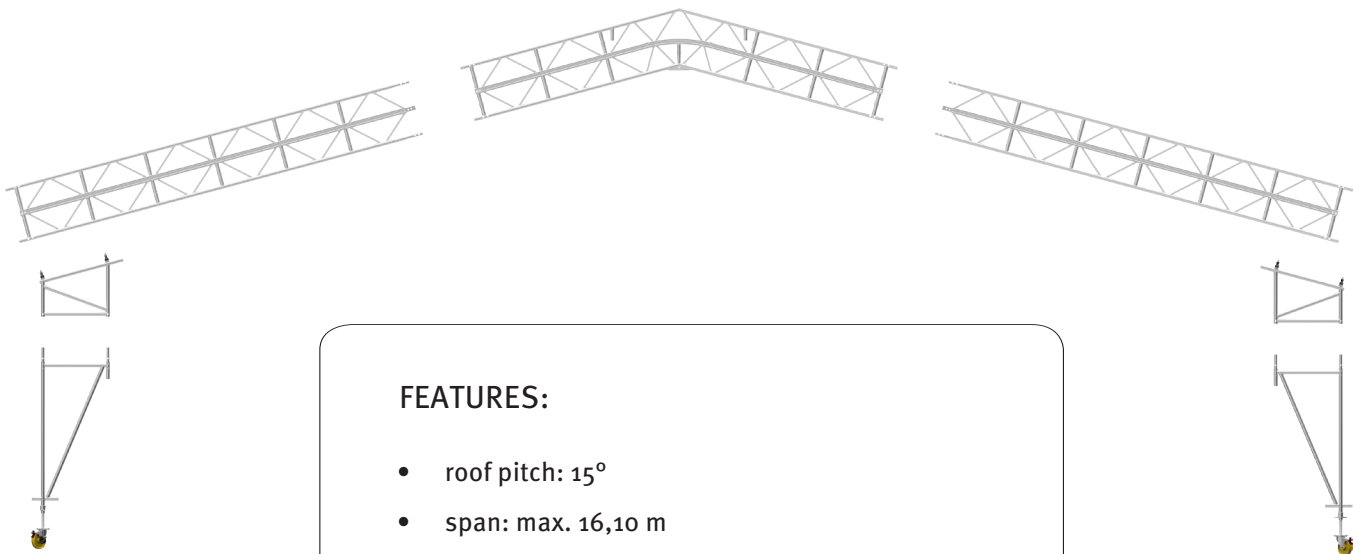

FEATURES:

- roof pitch: 15°
- span: max. 16,10 m
- triangular support and track - guided castor required
- easy to move by hand
- highly durable, translucent Keder tarpaulin
- system - independent application